

POLYCRYSTALLINE SILICON | PHOTOVOLTAIC MODULES
40 W | 50 W | 75 W



About APS:


Australian Premium Solar (APS) is 100% Australian Owned managed and operated. APS supplies imported high quality renewable energy products Our solar panels are manufactured in accordance with APS's high standards of design and Quality Control Which ensure higher PV energy yields.

APS opened an advanced facility in Queensland, Australia for research and development and local testing of solar panels. The 2000 sq. mtr. facility is staffed by qualified engineers, who are dedicated to exploring ways to achieve the continuous improvement of our solar cells and solar modules.

12 Years Product Warranty | **30** Years Performance Warranty

91.2% Power Output Up To 12 Years | 80.7% Power Output Up To 30 Years

ISO 9001 : Quality Management System | CHUBB Insurance | PID Free

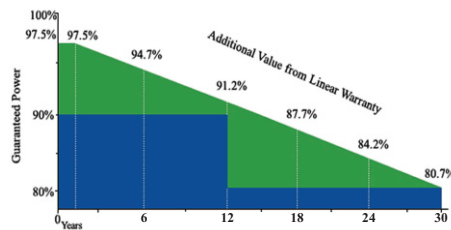

Designed in Australia | Manufactured in India



Australian Brand Manufactured in accordance with APS's high standards of design and Quality Control



Excellent module efficiency Solar cell efficiency up to 18.3%
 Module efficiency up to 16.69%



Positive tolerance Positive tolerance of up to 3% delivers higher output reliability for our all modules.



High performance Higher PV Energy yields even under low light and cloudy conditions



High Model Output Highest conversion efficiency



Reliability Premium quality raw material and advanced manufacturing processes guarantees the reliability of our modules



EL Tested (ELECTRO LUMINESCENCE) 100% EL double inspection



PID resistant and free of snail trails
 Increased module robustness to minimize micro-cracks

Web: www.australianpremiumsolar.co.in | Email: info@australianpremiumsolar.co.in

ELECTRICAL TYPICAL VALUES

Model	APSP6-40/36	APSP6-50/36	APSP6-75/36
Maximum Power (Pmax)	40 W	50 W	75 W
Voltage at max. power (Vmp)	17.89 V	18.39 V	18.53 V
Current at max. power (Imp)	2.28 A	2.75 A	4.32 A
Open Circuit Voltage (Voc)	21.15 V	21.71 V	21.85 V
Short Circuit Current (Isc)	2.42 A	2.92 A	4.58 A
Tolerance	Positive only	Positive only	Positive only
Module Efficiency	12.4%	12.86%	13.09%


MECHANICAL CHARACTERISTICS

External Dimensions	480 x 670 x 35 mm	580 x 670 x 35 mm	855 x 670 x 35 mm
Weight	4.7 kg	5 kg	7 kg


NOTE : STC: Irradiance 1000W/m² Module Temperature 25°C AM = 1.5

TEMPERATURE CHARACTERISTICS		MODULE CHARACTERISTICS	
NOCT (Nominal Operation Temperature)	: 45 ± 2°C	Solar Cells	Poly
Temperature Coefficient of Voc (β)	: -0.35%/°C	No. of Cells	36 Cells(9*4)
Temperature Coefficient of Isc (α)	: +0.05%/°C	Glass	Low iron, tempered glass, 3.2mm
Temperature Coefficient of Pmax (γ)	: -0.45%/°C	Frame	Anodized aluminum alloy
ABSOLUTE MAXIMUM RATING		Junction Box	IP65/67 rated
Parameter	Values	Cable & Plug Connectors	Optional
Operating Temperature	From -40° to 85°	Maximum Snow Load	2400 Pascal
Maximum Series Fuse Rating	15 A	Maximum Wind Load	5400 Pascal
IEC Application Class	IEC 61215, IEC 61730, IEC 61701, IEC 62804	Hailstone Impact Test	80 km/h for 25mm ice ball
Maximum System Voltage	1000v (IEC 61215) 600v (UL 1703)		

MODULE DIMENSION

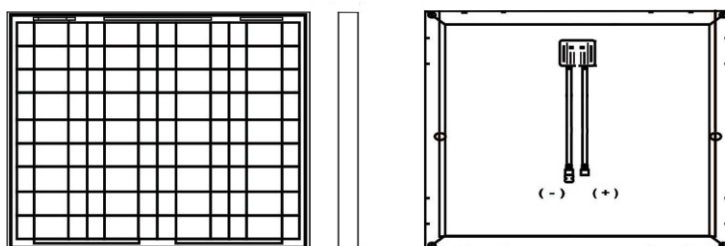

I-V CURVE

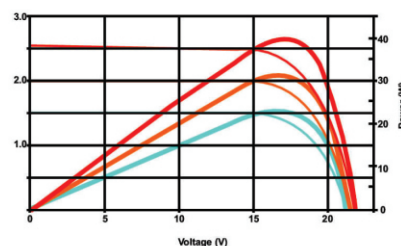

Corporate Office :

Australian Premium Solar (India) Pvt. Ltd.,
B-802, 8th Floor, Shapath Hexa, Nr. Sola Bridge,
Opp. Gujarat High Court, S. G. Highway,
Ahmedabad-380061. Gujarat (India).
M. : +91 76220 23259, +91 95121 00151
Email: sales@australianpremiumsolar.co.in
Web: www.australianpremiumsolar.co.in

Factory :

Australian Premium Solar (India) Pvt. Ltd.,
Plot No. 143, Road No. 4A, GIDC-Kathwada
Ahmedabad-382430. Gujarat (India).
M.: +91 76220 23249

Australia Unit :

Australian Premium Solar Pvt. Ltd.,
Unit 4/29, Bellrick Street, Acacia Ridge,
Queensland-4110. Australia.
Ph.: +61-7-3162 0075, **Fax.:** +61-7-3162 0075