

## POLYCRYSTALLINE SILICON | PHOTOVOLTAIC MODULES

335 W



# YEARS PRODUCT WARRANTY

91.2% Power Output Up To 12 Years



# YEARS PERFORMANCE WARRANTY

80.7% Power Output Up To 30 Years



ISO 9001 | ISO 14001 IEC 61215 | IEC 61730 IEC 61701 | IEC 62716 IEC 62804 | IEC 60068



- Australian Brand Manufactured in accordance with APS's high standerds of design and Quality Control
- Positive tolerance Positive tolerance of up to 4% delivers higher output reliability for our all modules
- High Model Output Highest conversion efficiency
- EL Tested (ELECTRO LUMINESCENCE) 100% EL double inspection
- Excellent module efficiency Solar cell efficiency up to 21.2% Module efficiency up to 18%
- High performance Higher PV Energy yeilds even under Low light and cloudy conditions
- Reliability Premium quality raw material and advanced manufacturing processes guarantees the reliability of our modules
- PID resistant and free of snail trails increased module robustness to minimoze micro-cracks




Web:www.australianpremiumsolar.co.in | Email:sales@australianpremiumsolar.co.in

# About APS

Australian Premium Solar (APS) is proud to be an Australian owned, managed and operated company which supplies imported and MADE IN INDIA high quality & durable renewable energy products, by keeping the top quality of our material and customer support of the highest priority. APS has came up as one of the leading solar energy solution provider companies across the state of Gujarat as well as India market. APS brought its years of experience and expertise together and established a State of the Art manufacturing facility in India at Tajpur, Ahmedabad, Gujarat.

Our solar panels are IEC & BIS certified as well as ALMM Approved and manufactured in accordance with strict quality assurance policy of APS. We supply innovative and dynamic solar power solutions for residential, commercial, industrial, state/central governments or utility applications. At APS, we develop and maintain all types of high quality designed and certified solar Energy Equipments with continues improvement as practice. we are determined to provide solutions to all clean energy needs.

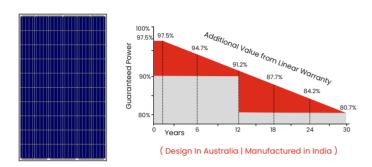

## **MECHANICAL CHARACTERISTICS**

| Dimensions | 1985 X 1000 X 35 MM |
|------------|---------------------|
| Weight     | 21.5 Kg             |

NOTE : STC :

### Irradiance 1000W/m2 Module Temperature 25°C AM=1.5

### **TEMPERATURE CHARACTERISTICS**

| NOCT (Nominal Operation Temperature ) | : 47 ± 2°C  |
|---------------------------------------|-------------|
| Temperature Coefficient of Voc (ß)    | : -0.35%/°C |
| Temperature Coefficient of Isc (a)    | : +0.05%/°C |
| Temperature Coefficient of Pmax (y)   | : -0.45%/°C |

## **ABSOLUTE MAXIMUM RATING**

| Parameter                  | Values  |
|----------------------------|---|
| Operating Temerature       | From -40° to 85°                              |
| Maximum Series Fuse Rating | 15 A  |
| IEC Application Class      | IEC 61215, IEC 61730,<br>IEC 61701, IEC 62804 |
| Maximum System Voltage     | 1000v DC(IEC 61215)<br>600v (UL 1703)         |

### Note :

The Specifications in this datasheet are subject subject to change without any notice. The Electrical data given here is for reference purpose only.

Please contact our sales team for any customized solutions.

Please read safety and installation instructions before using the product. Subject to Ahmedabad Jurisdiction.


### \*Warranty:

Please read APS India warranty documents thoroughly on http://australianpremiumsolar.co.in/warranty/


| ELECTRICAL TYPICAL VALUE    |               |  |
|-----------------------------|---------------|--|
| Model                       | APSAP6-335/72 |  |
| Maximum Power (Pmax)        | 335 W         |  |
| Maximum Power Voltage (Vmp) | 37.6 V        |  |
| Maximum Power Current (Imp) | 8.91 A        |  |
| Open Circuit Voltage (Voc)  | 46.3V         |  |
| Short Circuit Current (Isc) | 9.39 A        |  |
| Tolerance                   | Positive only |  |
| Module Efficiency           | 17.10%        |  |

### **MODULE CHARACTERISTICS**

| Solar Cells             | Poly                                 |
|-------------------------|--------------------------------------|
| No.of Cells             | 72 Cells (12*6)                      |
| Glass                   | Low Iron, tempered glass, 3.2mm      |
| Frame                   | Anodized aluminum alloy              |
| Junction Box            | IP65/67 rated                        |
| Cable & Plug Connectors | 1.0 X 4.0SQMM Mc4 compatible / IP 67 |
| Maximum Snow Load       | 2400 Pascal                          |
| Maximum Wind Load       | 5400 Pascal                          |
| Hailstone Impact Test   | 80 km/h for 25mm ice ball            |



### **TEMPERATURE CHARACTERISTICS**



## Toll Free : 1800-313-5052

Corporate Office : 301, 3rd floor, Satyamev Eminence, Nr. Shukan Mall, Science City Road, Ahmedabad, Gujarat - 380060.

Factory : At & Post - Tajpur, N.H.-08, Ta - Prantij, Dist - Sabarkantha, Gujarat-383205 (India).